


Item Description					Quantity	Unit	Unit Rate (Ex GST)	Amount (Ex GST)	
1	P&G								
1.1	Site Establishment & Dis-establishment					Lump Sum	N/A	\$4,000.00	Refer Site Estblishment calcs
1.2	Admin (Supply HSQE documentation / program) / insurances and any other necessary documentation - does not necessarily include the use of 3rd party online HSQE system - unless agreed					Lump Sum	N/A	\$1,200.00	Refer Admin/OH Calcs
1.3	Survey setout - excl S/W					Lump Sum	N/A	\$1,400.00	Refer quote + margin 12.5%
	Sub Total							\$6,600.00	
2	Environmental Control								
2.1	Silt Fence Erection (Refer workings for total meterage calcs)	231	m	\$7.50				\$1,732.50	Refer Silt Fence calcs
2.2	Temporary entrance shake down's - excl steel grids (5m x 5m) 75mm rock	1	No	\$600.00				\$600.00	Refer Temp Entrance Calcs
	Dust Suppression - earthwork / pavement rates inclusive of onsite water-cart							incl	
	Road Sweeping - in the event material tracked onto roads - otherwise POA for daily / weekly undertaking							incl	
	Sub Total							\$2,332.50	
3	Demolition & Earthworks								
	Demolition								
3.1	Tree Removal incl Root Structure to stockpile		LS	\$5,625.00				PC Sum	Refer PC Sum calcs
3.2	Fauna Spotter	1	day	\$1,001.25				PC Sum	
	Earthworks								
3.3	Slash Grass - site visit identified long grass	4277	m2	\$0.40				\$1,710.80	Refer quote + margin 12.5%
3.4	Remove 100mm topsoil / grass covering to waste - approx 4277m2	428	m3	\$28.00				\$11,984.00	Refer earthworks calcs
	e/o for body truck only		m3	\$5.00				rate only	
	Remove 100mm topsoil / grass covering to stockpile for re-use in Landscape Zones		m2	\$10.00				rate only	
	Rear Pad (Carpark)								
3.5	Cut to Fill - approx 400m2	400	m3	\$23.00				\$9,200.00	Refer earthworks calcs
	e/o for body truck only		m3	\$5.00				rate only	
	extra over for non rippable rock with 24T Excavator - rate only		m3	\$90.00				rate only	
	Tennis Court/Hardstand Area								
3.6	Cut to Fill - approx 960m2	960	m3	\$23.00				\$22,080.00	
	e/o for body truck only		m3	\$5.00				rate only	
	etra over for non rippable rock with 24T Excavator - rate only		m3	\$90.00				rate only	
	House Pad								
3.7	Cut to Fill - approx 285m2	285	m3	\$23.00				\$6,555.00	
	e/o for body truck only		m3	\$5.00				rate only	
	etra over for non rippable rock with 24T Excavator - rate only		m3	\$90.00				rate only	
3.8	Final Trim & Proof Roll - 4277 - 965 (Landscape Areas/Other)	3312	m2	\$1.00				\$3,312.00	Refer earthworks calcs
	Pool								
3.9	Cut to SP - (re-use in retaining wall backfill) - approx 72.5m3	73	m3	\$10.00				\$725.00	Refer earthworks calcs
	Swale Drain								
3.10	Cut to SP (re-use in retaining wall backfill) - approx 80m2	8	m3	\$10.00				\$80.00	
3.11	Turfing to swale - no allowance for topsoil to between turf and subgrade	80	m2	\$7.00				\$560.00	Refer quote + 12.5% margin
	Geotechnical								
3.12	Geotech Supervision - Level 1 incl N/D testing - but excluding RPEQ certification	1	LS	\$2,000.00				\$2,000.00	Refer Quote + 12.5% margin
	Sub Total							\$58,206.80	
4	Stormwater								
	Drainage - trench, supply, bed, lay, cap, joint and backfill concrete RCRRJ pipe incl CCTV								
	Sub Total							\$0.00	
	Sewer - By Plumber								
	Sewer - trench, supply, bed, lay, cap, joint and backfill hdpe pipe incl , bends, bulk heads, marker posts, surface boxes, pressure testing etc								
	Sub Total							\$0.00	
	Water - By Plumber								
	Water - trench, supply, bed, lay, cap, joint and backfill hdpe pipe incl , bends, bulk heads, marker posts, surface boxes, pressure testing etc								
	Sub Total							\$0.00	
	Site Services - excl by Electrical - Price available upon request								
	Services- trench, supply, bed, lay, cap, joint and backfill hdpe pipe incl , bends, bulk heads, marker posts, surface boxes, pressure testing etc								
	Sub Total							\$0.00	
5	Pavements - Provisional Sum								
	Supply, lay, grade, compact and compaction test								
	Internal Only								
	Access Driveway								
	Rigid Pavment								
5.1	CBR45 x 150mm - (98.8m x 3m x .15)	44.46	m3	\$75.00				\$3,334.50	Refer earthworks calcs
	Rear Pad (Carpark)								
	Rigid Pavment								
5.2	CBR45 x 150mm - (400m2 x .15)	60	m3	\$75.00				\$4,500.00	
	Sub Total							\$7,834.50	
6	Detailed Excavations								
	Excavate for								
	Footings / Thickeneing		m3					POA	
	Sub Total							\$0.00	
7	Retaining Walls								
	Backfill to								
7.1	Bidim Cloth	260	m2	\$5.00				\$1,300.00	refer ret wall calcs
7.2	Agi Drains - (point of discharge by plumber if stormwater not part of scope)	260	m	\$6.00				\$1,560.00	
7.3	Free Draining Agg	117	m3	\$65.00				\$7,605.00	
	Sub Total							\$10,465.00	
							TOTALCOST (excl GST)	\$85,438.80	
							GST	\$	8,543.88
							TOTALCOST (incl GST)	\$	93,982.68

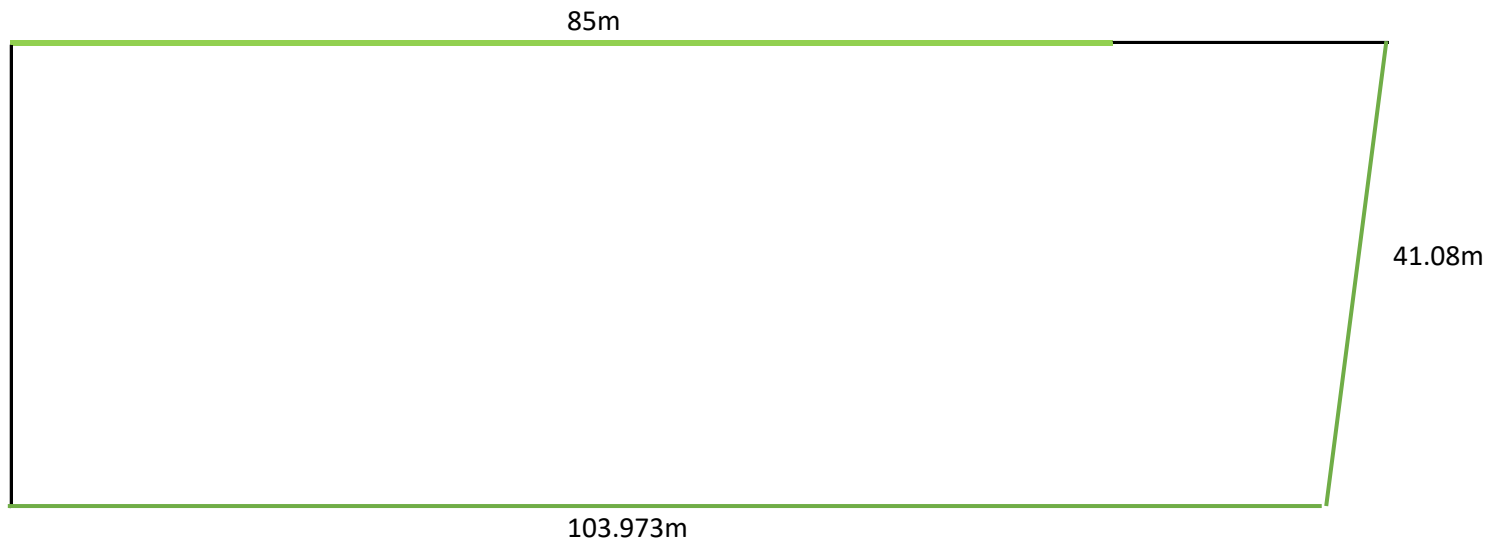

$$\begin{aligned}\text{Silt Fence} &= 85 + 103.983 + 41.08 \\ &= 231\text{m}\end{aligned}$$

Active Turf Supplies

A.B.N. 16 010 498 236

PO Box 306 Waterford Qld 4133

Mob : 0413 949841 Ph : (07) 5543 1238 Email: accounts@activeturfsupplies.com.au

Customer :

Carsburg Civil Pty Ltd
207 Elliot Road,
Banyo QLD 4014

Quote **00091218**

DATE 15/09/2021

Cust. P.O.

Page Page 1 of 1

Job Address :

Condamine Dr
Fernvale

Customer ABN: 66 631 834 903


QTY.	DESCRIPTION	EXCL. PRICE	UNIT	EXCL. AMT	GST	INCL. AMT
80	Turf - Supply & Lay	\$3.90	m2	\$312.00	\$31.20	\$343.20
1	Delivery & Labour	\$120.00	ea	\$120.00	\$12.00	\$132.00
				\$432.00	\$43.20	\$475.20
Email Remittances to: accounts@activeturfsupplies.com.au						
EFT - Westpac BSB - 034047 A/C - 128584						
ACTIVE TURF SUPPLIES QUALITY PRODUCT AND QUALITY SERVICE						

Pool Excavation

10m



5m

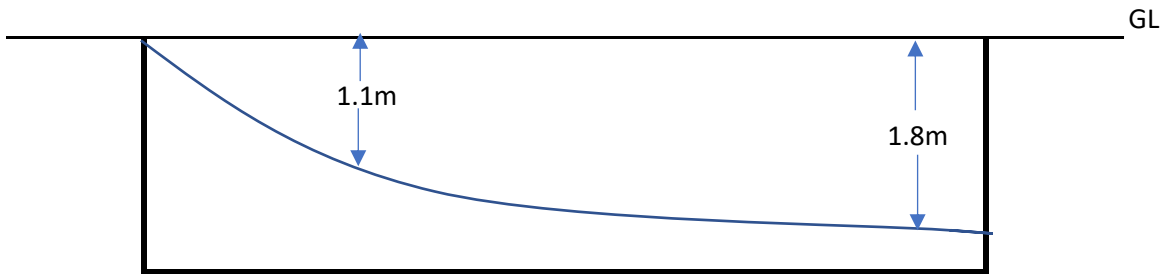

Cut to Fill: $10\text{m} \times 5\text{m} \times ((1.8\text{m} + 1.1\text{m})/2)$
= 72.5m³

Admin & OH Costs

Produce SWMS/ITPS/Site Folder	48 1.5hrs @ \$32
Estimating Services	59 1hr @ \$59
Insurances	
Workcover	41.25
Public Liability	535
Contract Works	365
	1048.25
Margin 12.5%	131.03
	\$ 1,179.28
	\$ 1,200.00

Insurance costs worked out as a % project turnover * premium

Workcover = $95,000/5000,000 * (\$94,691/12)/4$ duration of project 1 week

Public Liability = $95,000,000/5000,000 * \$28,209$

Contract Works = $95,000/5000,000 * \$19,239$

CALCULATIONS	Bulk	Notes/Calcs	Topsoil	Bulk	AC	Trim & Proof
Task	Cut to Fill		Strip to W	Cut to SP	Import 2.3	Roll
Production Rate	30	Volume moved per hour	35	55	30	400
Unit	m3		m3	m3	m3	m2
Plant & Labour Required						
Exc 20T = 145/hr	\$145.00		\$145.00	\$ 145.00	\$145.00	
Exc12-15T = 142/hr						
Exc 8-15T = 135/hr						
Exc3-8T = 126/hr						
Drott - \$170/hr	\$170.00			\$ 170.00		\$ 170.00
Grader - \$190/hr						
Bob Cat / Pozzi - \$130/hr						
Spotter - \$65	\$65.00		\$65.00	\$ 65.00	\$65.00	\$ 65.00
Body Truck - \$90/hr	\$90.00			\$ 90.00		
Semi / Moxy - \$125						
Roller - 7T+ \$140/hr					\$140.00	
Roller - 7T- \$100/hr						
Water Cart - \$110/hr	\$110.00				\$110.00	\$ 110.00
Hrly Rate	\$580.00	= 145 + 170 + 65 + 90 + 110	\$210.00	\$ 470.00	\$460.00	\$ 345.00
Volume - m3	1645	= 960 + 285 + 400	428	81	105	3312
Production Rate - m3/hr	30		35	55	30	400
Hrs Required	54.83	= 1645/30	12.23	1.47	3.50	8.28
Rate per hr	\$580.00		\$210.00	\$ 470.00	\$460.00	\$8.28
Cost	\$31,803.33	= 54.83 * 580	\$2,568.00	\$ 692.18	\$1,610.00	\$2,856.60
Volume	1,645.00		428.00	81.00	105.00	3,312.00
Rate per m3	\$19.33	= 31,803.33 / 1,645	\$6.00	\$ 8.55	\$15.33	\$345.00
Tender rate per m3	\$19.33		\$6.00	\$ 8.55	\$15.33	\$0.86
Fill Delivered per m3					\$48.40	= 22 x 2.2 (rate to get m3 cost)
Tender rate per m3						
Dumping Fees			\$17.60			
Margin - 17.5%	\$3.38	= 19.33 * 0.175	\$4.13	\$ 1.50	\$11.15	\$0.15
Cost & Margin	\$22.72	= 3.38 + 19.33	\$27.73	\$ 10.04	\$74.89	\$1.01
Rounding	\$23		\$28	\$10	\$75	\$1.0

Notes:
 * sourced a tip site charging \$11/m3 to dump
 x 1.6 to get loose meters

Cut to Fill


Rear Pad 40 x 25m = 1000m²
 (1000/2) x (52.3 - 51.5)
 500 x .8 = 400m³

Middle Pad 40 x 48m = 1920m²
 (1920/2) x (49.5 - 48.5)
 960 x 1 = 960m³

Building Pad 40 x 35.5m = 1420m²
 (1420/2) x (46.1 - 45.7)
 710 x .4 = 284m³

RL = 45.7

5mm Squares

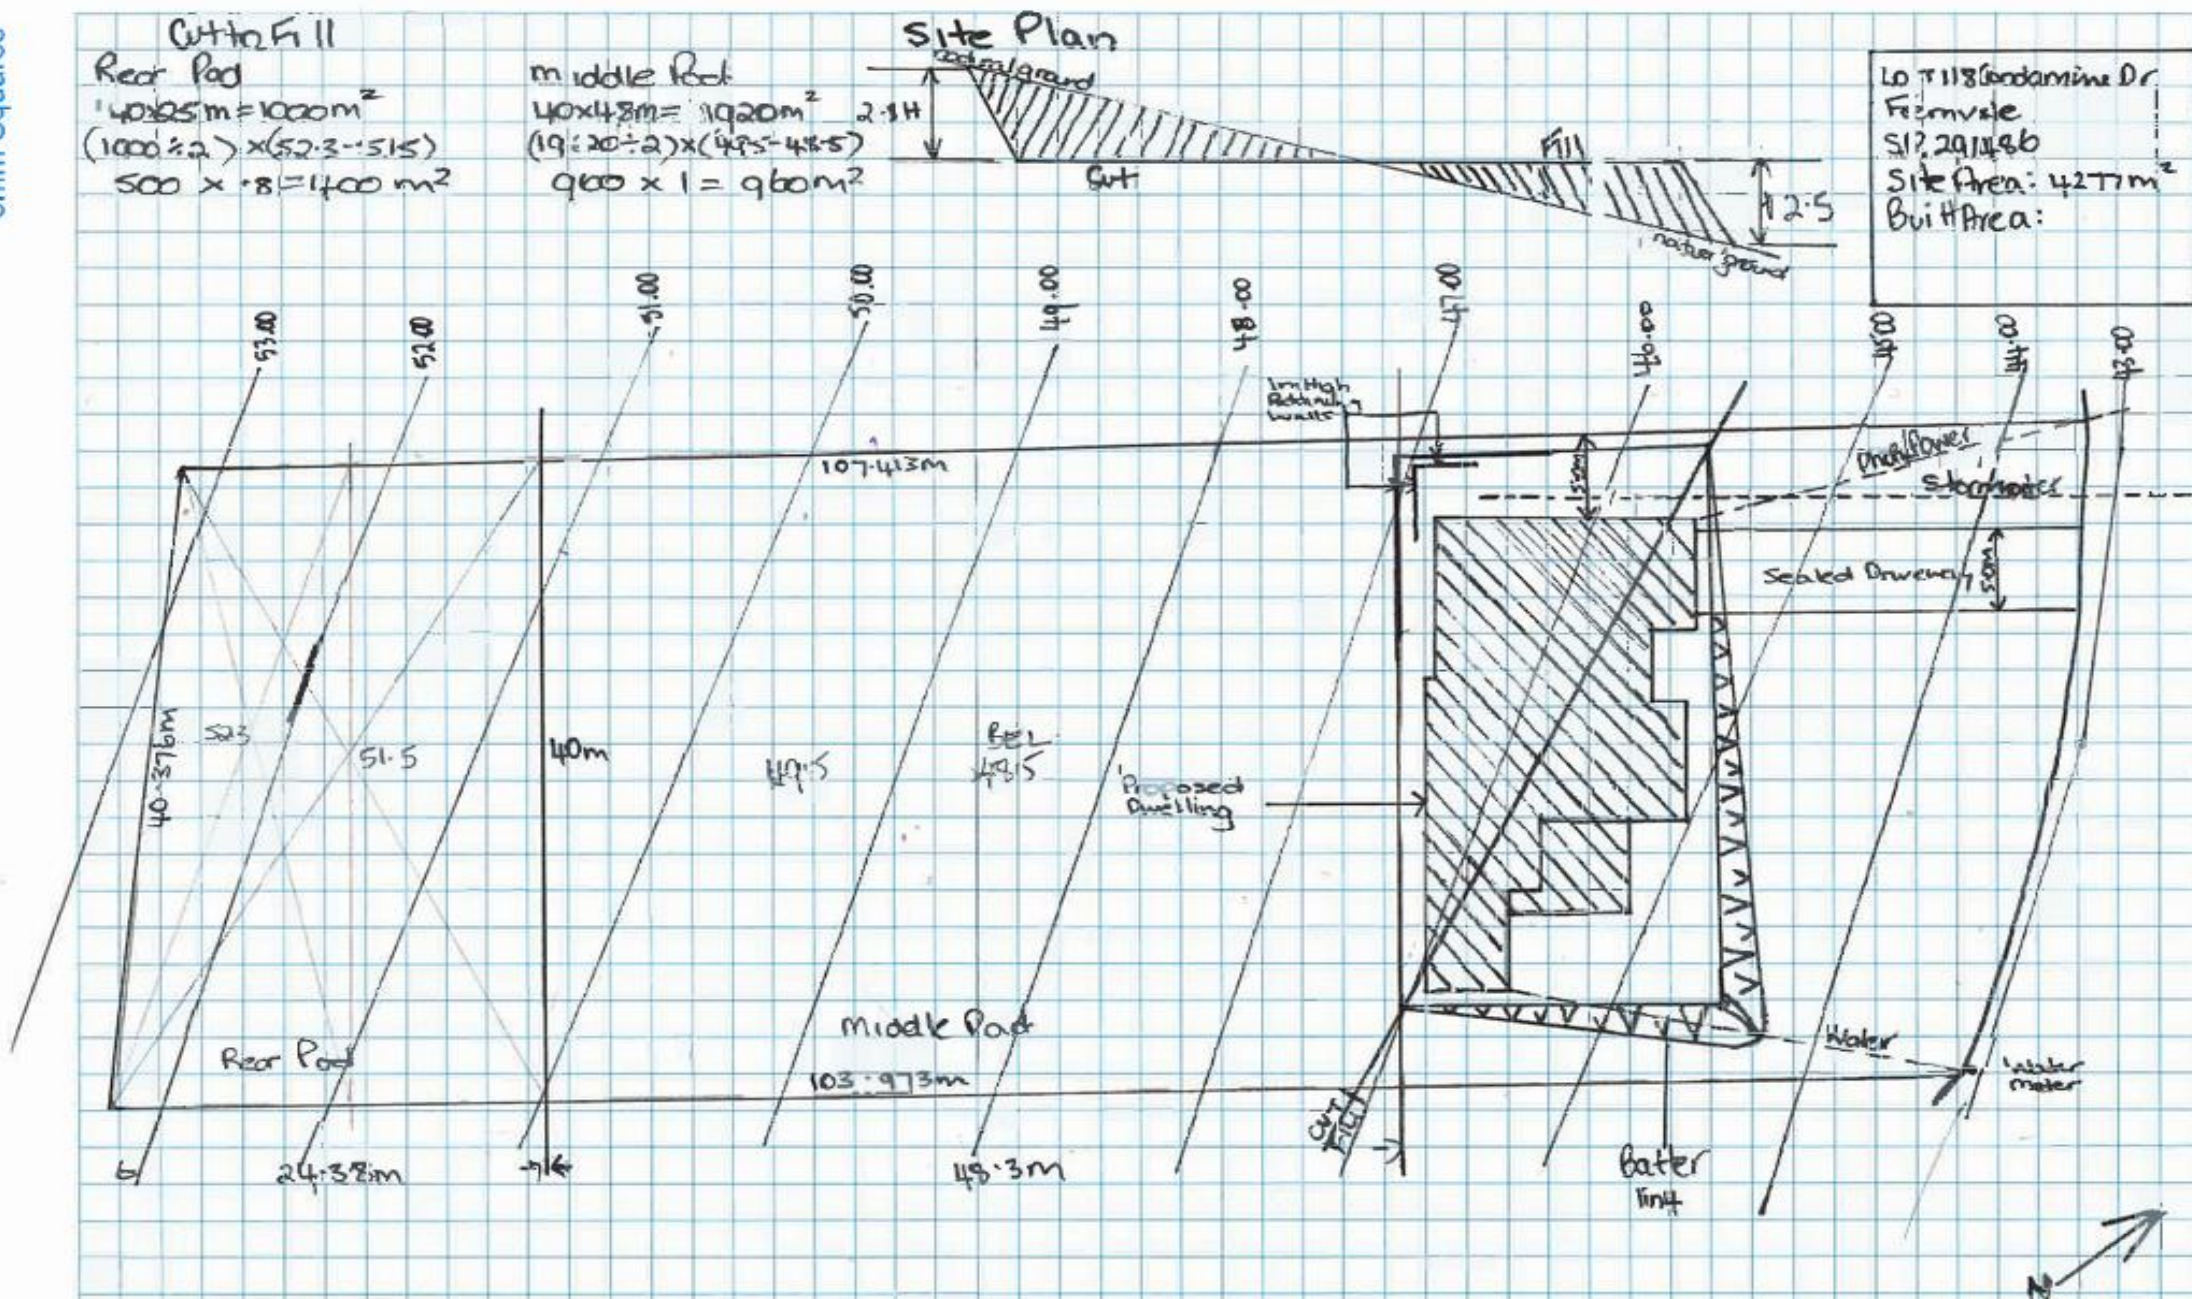

Final Trim and Proof Roll

3311.872 3312


Landscape Area/Other Calcs

Other -

Spray Area	= 38.95m x 12.93m	482.59m2
Mulch Area	= 35.1m x 5m	175.52m2

Landscape Areas -

Driveway Grassed Area	= 30.975m x 5.369m	166.3m2
Rear Pad:		
1	= 7.02m x 4.13m	28.996m2
2	= 10.325m x 6.33m	65.384m2
3	= 6.6m x 7.02m	46.338m2
Total		965.128

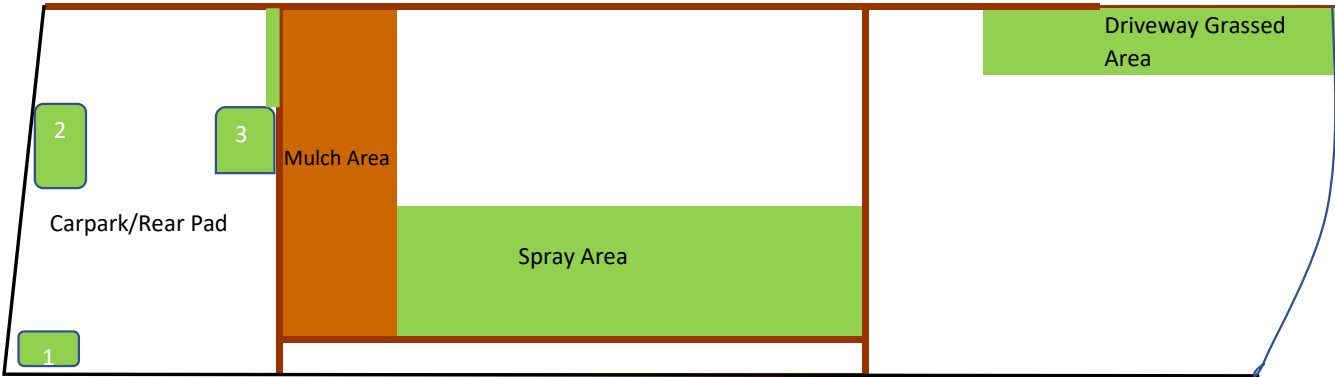

Tree Removal

Amount = Quote (\$5000) + 12.5% margin \$ 5,625.00


Fauna Spotter

Amount = 1 days work

Fauna Spotter	= 8hrs @ \$65	520
Habitat Assessment	= min 4 hrs	260
Activities Report	= min 2hrs	110
		<u>890</u>
12.5% margin		111.25
Total		<u>\$ 1,001.25</u>

Retaining Walls 1m high

Bidim	= 40m x 3 + 91.58m + 46.71m	
	=258.29 x 1m high	
	= 260m2	
	1 roll = 400m2	\$ 280.00
Agi Drain	= 260L/M	\$ 1,300.00
Free Draining Agg	allow 450mm width	1m3 = 1.54T
	= 260 x .45	
	= 117m3 =180T	\$ 3,330.00

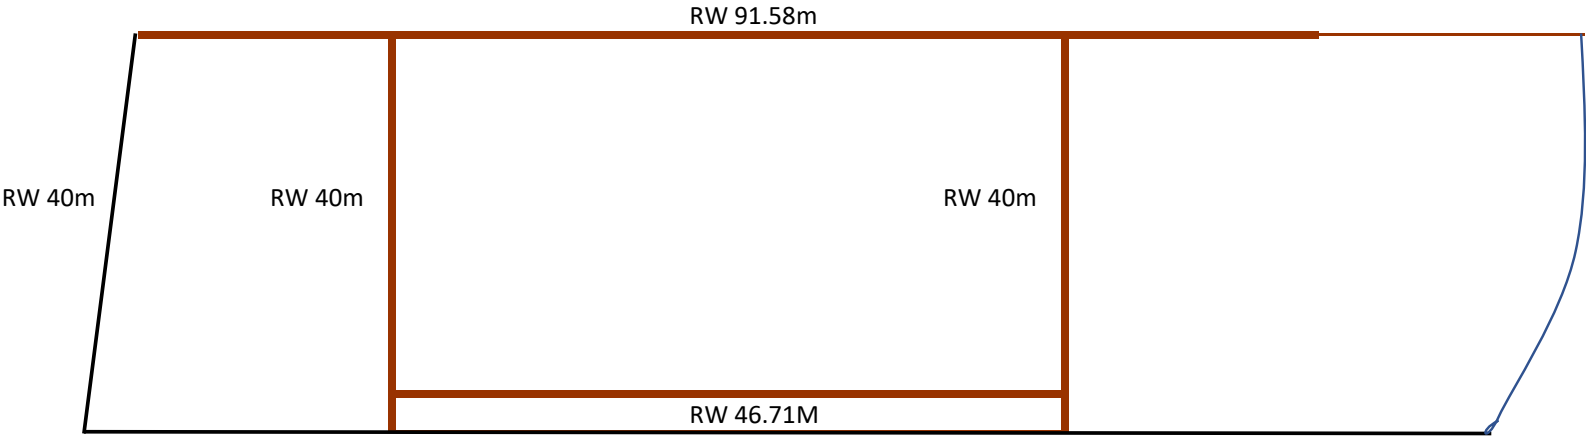

	20mm Agg Supply and Place	
Production Rate	11.00	
Unit	m3	
Plant		
8T	\$122.00	
Drott / Grader		
Body Truck	\$98.00	
Combo	\$122.00	
Spotter	\$65.00	
Grader		
Sheepsfoot / Smooth Drum		
Water Cart		
Hrly Rate	\$407.00	
Volume - m3	66	
Production Rate - m3/h	11	
Hrs Required	5.96	
	6	
Rate per hr	\$407.00	
Cost	\$2,427.20	
Volume	65.60	
Rate per m3	\$37.00	
Tender rate per m3	\$37.00	
Fill Delivered per m3		
Tender rate per m3		
Dumping Fees	\$18.50	Qld Recycling rate per tonne
Margin	\$9.71	
Cost & Margin	\$65.21	
Rounding	\$65	

5 days

Plant Float to site and return

	quote	per	cost
20T Exc with 2 buckets	700	2	1400
15T Roller	770	2	1540
Drott			
Day 1	170	1	170
Day 2	85	1	85
Day 3	85	1	85
Day 4	85	1	85
Day 5	85	1	85
			<u>510</u>
			3450
+ 12.5% Margin			431.25
Total			<u><u>\$ 3,881.25</u></u>

Temp Entrance

= 5m x 5m x .2

5m³ 40/75mm

1 load = 15T 1m³ = 1.54T
10m³

Install	40-75mm gravel	1 load @	\$250	\$	250.00
	20T Exc to place	1/2 hr @	\$145/hr	\$	72.50
				\$	322.50
				\$	322.50

Removal	10m ³ Tipper	1 hr @ \$98	\$	98.00
	20T Exc	1/2 hr @ \$145/hr	\$	72.50
	Reuse			
			\$	170.50


Margin 12.5%

\$ 493.00

\$ 61.63

\$ 554.63

\$ 600.00

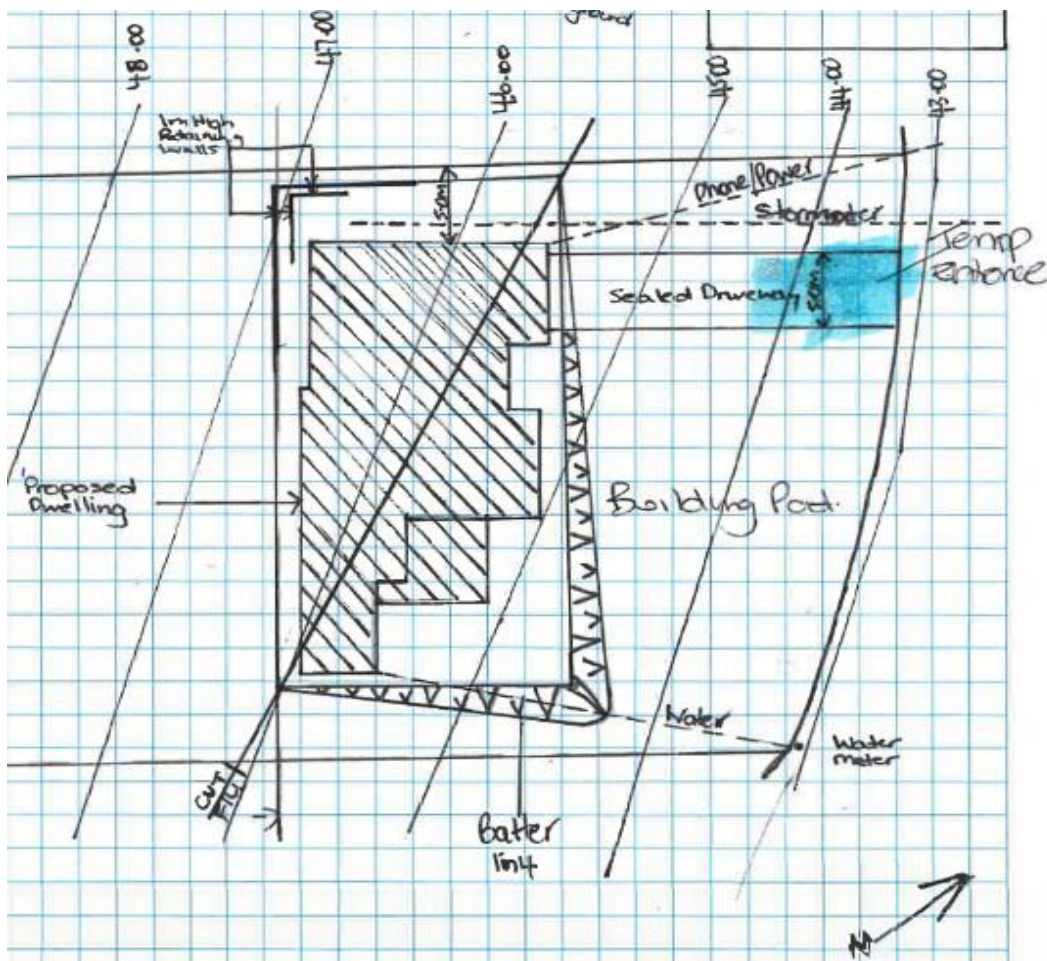

QUOTE

Page 1 of 1

Carsburg Civil Pty Ltd
PO Box 8
Banyo
QLD 4014**Quote No:** 220035
Date: 30/08/2021
Project No: 2624/P/1157
Client Email: accounts@carsburgearthmoving.com.au
Client Code: 501CARS02
Cost Centre: 5006**Project Name:** Site Works, Fernvale - Condamine Drive**Your Reference:** TBA

Description	Qty	Unit Rate	Unit	Total (Ex. GST)	Total (Inc. GST)
Field Density (AS / Nuclear Gauge with Oversize)	3	\$42.00	Each	\$126.00	\$138.60
Site Visit	3	\$60.00	Each	\$180.00	\$198.00
Rapid Reference Density (AS / Standard A Mould)	3	\$90.00		\$270.00	\$297.00
Technician Time	9	\$58.00	Per Hour	\$522.00	\$574.20
Field Density (AS / Nuclear Gauge)	3	\$35.00	Each	\$105.00	\$115.50
Level One Report	1	\$100.00	Each	\$100.00	\$110.00
Dynamic Cone Penetrometer (AS)	4	\$100.00	Each	\$400.00	\$440.00

PAYMENT OPTIONS

EFT Details:

BSB: 343-001
Account No: 096 346 001

For Credit Card Payment

Please Call 07 3320 8500
Or Email: cseftremitts@constructionsciences.net**Total (Inc. GST):** **\$1873.30****Terms:** NETT 30 Days EOM

Quote



Attention:

Carsburg Civil

PO Box 246, Samford QLD 4520
Phone: (07) 54982026 (a/hrs)
Mobile: 0411 800 812
Fax: (07) 54982020
jedcon@civildrainage.net.au
QBSA Lic. 050 843
ABN: 26 054 463 099

Quote: 00003906

Date: 20/09/2021

Terms: Net 14

Purchase Order:

Description

Condamine Dr , Fernvale ----- Supply & delivery of 260m of Socked AGY pipe to Fernvale -	\$1300.00
GST: \$130.00 Total Inc GST: \$1,430.00	



by mail

Detach this section and mail with your cheque to...

John England Drainage Contractor Pty
PO Box 246
SAMFORD QLD 4520



by direct credit

Please quote invoice number in the memo...

Commonwealth Bank of Australia
BSB: 064 116
Account No: 1001 0392
Name: John England Drainage Contractor Pty Ltd

00003906

Cut to Fill

Rear Pad

$$40 \times 25 \text{ m} = 1000 \text{ m}^2$$

$$(1000 \div 2) \times (52.3 - 51.5)$$

$$500 \times 0.8 = 400 \text{ m}^2$$


Site Plan

middle Rock.

$$40 \times 48 \text{ m} = 1920 \text{ m}^2$$

$$(1920 \div 2) \times (49.5 - 48.5)$$

$$900 \times 1 = 900 \text{ m}^2$$

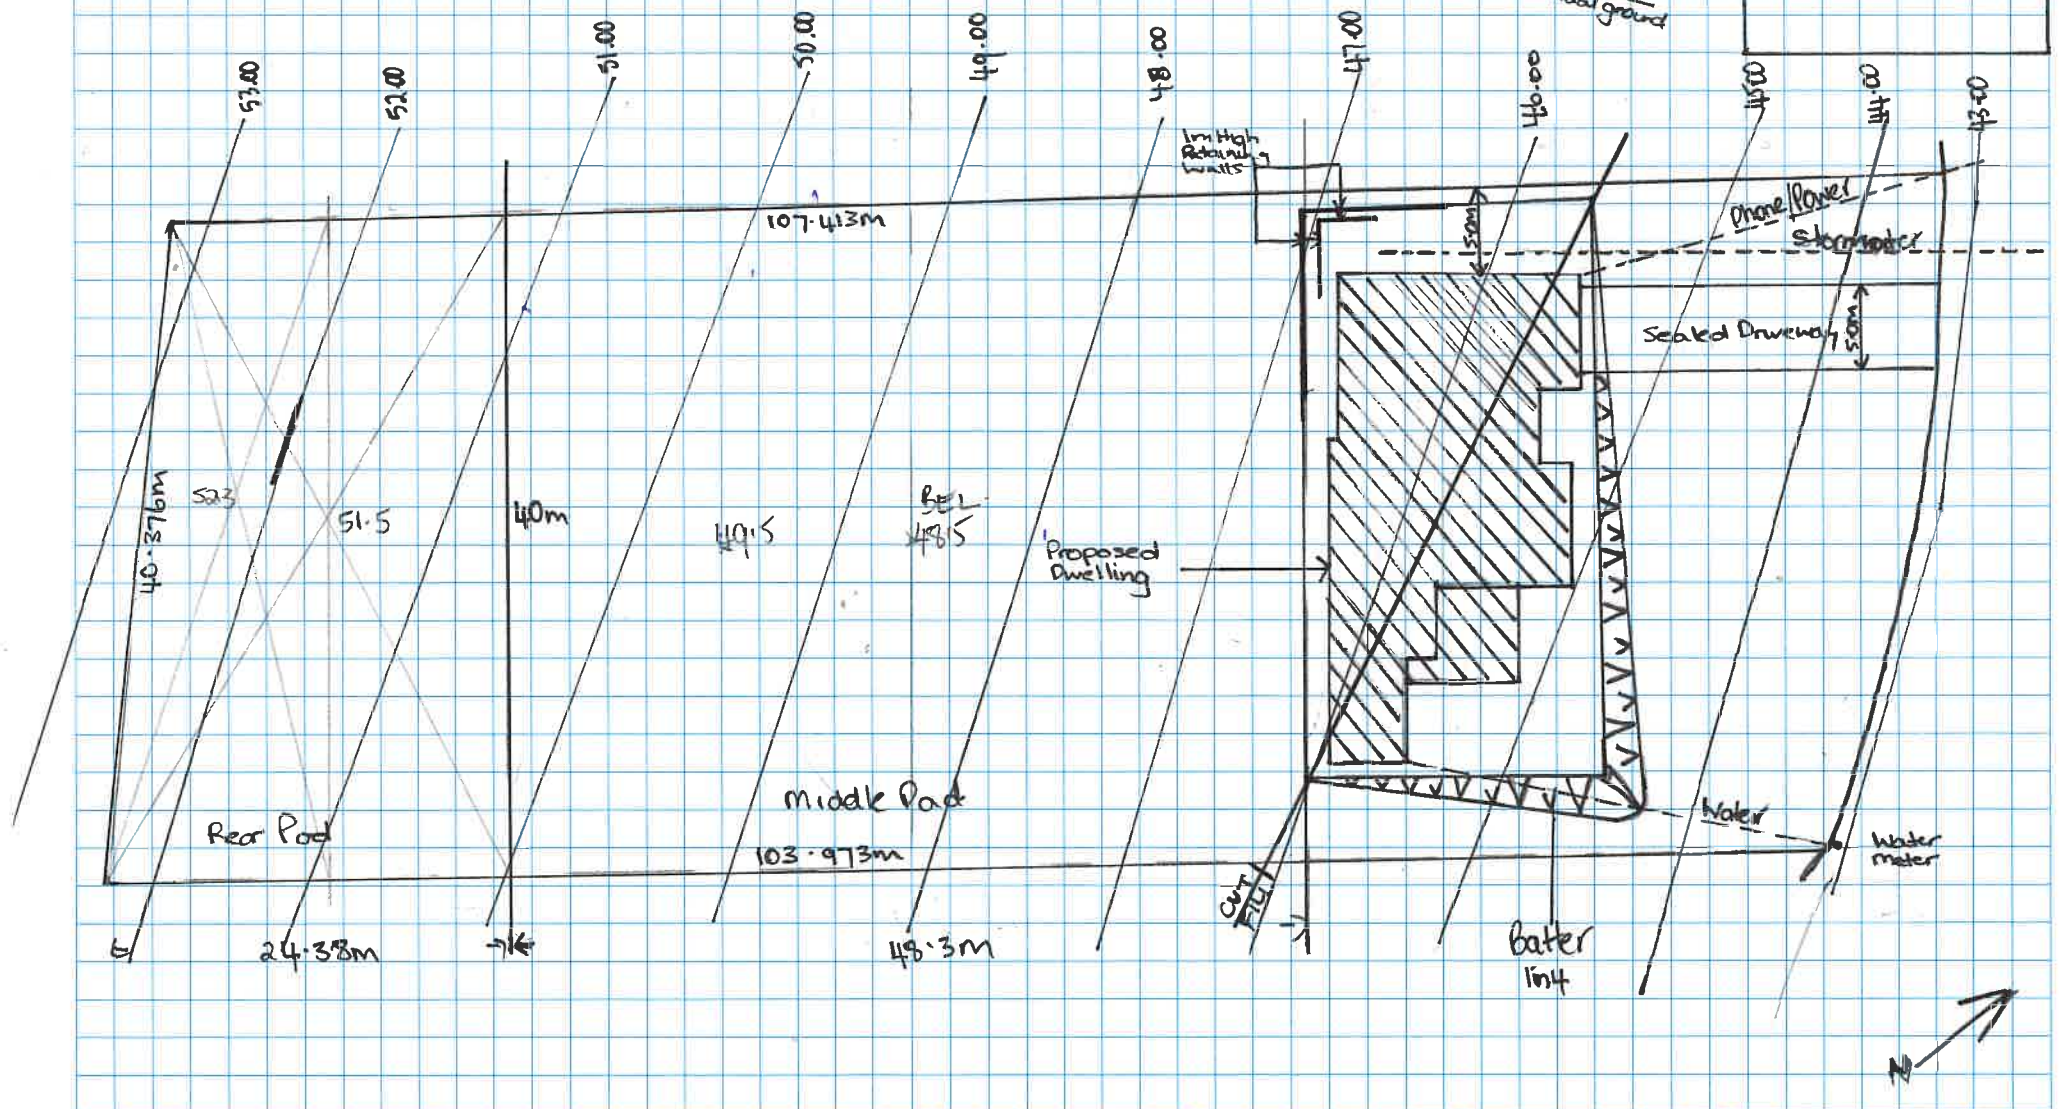

QUOTE

Page 1 of 1

Carsburg Civil Pty Ltd
PO Box 8
Banyo
QLD 4014Quote No: I006-220071
Date: 02/09/2021
Project No:
Client Email: accounts@carsburgearthmoving.com.au
Client Code: 501CARS02
Cost Centre: 5006**Project Name:** Condamine Drive, Fernvale**Your Reference:** TBA

Description	Qty	Unit Rate	Unit	Total (Ex. GST)	Total (Inc. GST)
Site Visit	5	\$60.00	Each	\$300.00	\$330.00
Technician Time	3	\$58.00	Per Hour	\$174.00	\$191.40
Field Density (AS / Nuclear Gauge)	5	\$35.00	Each	\$175.00	\$192.50
Rapid Reference Density (AS / Standard A Mould)	5	\$90.00		\$450.00	\$495.00
Field Density (AS / Nuclear Gauge with Oversize)	6	\$42.00	Each	\$252.00	\$277.20
Level 1 Report	1	\$100.00	Each	\$100.00	\$110.00

PAYMENT OPTIONS

EFT Details:	For Credit Card Payment
BSB: 343-001	Please Call 07 3320 8500
Account No: 096 346 001	Or Email: cseftremitts@constructionsciences.net
Terms: NETT 30 Days EOM	

Total (Ex. GST):	\$1451.00
Total GST):	\$145.10
Total (Inc. GST):	\$1,596.10

Locked Bag 2523
Seven Hills, NSW 1730
ABN: 71 120 519 520
Email: accounts@globalsynthetics.com.au
Accounts: **02 9678 1478**
Sales: **07 3865 7000**

QUOTE 3929292

Date: 17/09/2021

Payment Date
Customer ID: 450122
Cust Ord No: TBA
Order No:

Salesperson : SHELLY.WHITE

Bill To:

Carsburg Civil Pty Ltd
207 Elliott Rd
BANYO, QLD 4014
AU

Ship To:

Carsburg Civil
Goods to be collected

Delivery Note:

Ordered By: TBA
Phone:

Item ID	Item Description	Pricing UOM	Qty	Price	Total
AS140/4/100	ProFab Non Woven AS140 4x100m ProFab Non Woven Geotextile AS140 4x100m	EA	1.00	280.0000	280.00
<i>Total Lines: 1</i>					
SUB-TOTAL:					280.00
GST:					28.00
AMOUNT :					308.00
					AUD

If you ever receive an email advising that Global Synthetics has changed their bank details, please verify this via telephone with your local Global Synthetics Representative.

Bank: ANZ Bank
BSB: 012-233
Account No: 494131296
Acc Name: Global Synthetics Pty Ltd

Customer ID: 450122
Paid: _____

Global Synthetics Pty Ltd (ABN: 71 120 519 520) trading as Global Synthetics supply goods and provide services to you, solely in accordance with our terms and conditions. Our terms and conditions can be found at www.globalsynthetics.com.au/about-global-synthetics. As we do not provide advice, it is your responsibility to satisfy yourself that any product or service you receive from us meets your particular needs and requirements.



Martin Worth Mowing

626 691 423

0413 157 358

mowing@martinworth.com

PO Box 138
Morningside Q4170

Bill To:

Carsburg Earthmoving

Quote

A.B.N. 99 639 390 413

Quote No.: 00620312

24/09/2021

Ship To:

Carsburg Earthmoving
Condamine Dr
Fernvale

15269

4277m2 Mow &
Tidy

Fernvale

0.32

1

\$1,368.64 N-T

BANK ACCOUNT DETAILS

Martin Worth Mowing

BSB 484 799

Acct # 16 737 7045

SUNCORP METWAY

Please note: an admin fee of \$25.00 per month will be applied to overdue accounts

MULCHING SERVICES PTY LTD

Land Clearing and Mulching

QUOTATION

20 September 2021

To:	Carsburg Earthmoving
Attention:	Virginia Hemsley
Project:	Lot 118 Condamine Dr, Fernvale

Thank you for the opportunity to price the above works, please find our quote outlined below **along with project specific notes if applicable**. Our standard terms and conditions are outlined following this quotation.

Description:

PRICE A: Our price to remove all vegetation to ground level using chainsaws and chip all vegetation and remove from site is \$3,000.00 plus GST.

PRICE B: Our price to excavate all stumps out and cart away off site and dump is \$2,000.00 plus GST.

(All works quoted are to be completed whilst on site unless other arrangements are in place).

Project specific notes:

NOTE 1: Price is inclusive of all vegetation to be cleared as per drawings provided.

NOTE 2: Price is inclusive of tree loppers and chipping required – Level 3 Arborist.

NOTE 3: All woodchip will be removed from site unless otherwise directed.

NOTE 4: Principal to provide Fauna Spotter Catcher for approx. 1 day for vegetation clearing only.

NOTE 5: Works will take approx. 3 days to complete, weather permitting.

NOTE 6: We have provided a separate price for excavation of stumps and cart away and dump.

STANDARD TERMS AND CONDITIONS:

Terms are payment within 30 days from completion of the job but with interim payments related to percentage of work completed if the work extends over a month end.

- CONDITION 1:** A purchase order will be required prior to commencement of works.
- CONDITION 2:** All Council regulations and permits are the responsibility of the developer or Civil Contractor.
- CONDITION 3:** All vegetation over existing services or that could cause damage to existing property fences or retaining walls will be cut off at ground level unless otherwise directed.
- CONDITION 4:** All rubbish, tyres, concrete, internal fences, asbestos, existing electrical and Telstra services etc., are the responsibility of the Principal or Civil Contractor unless other arrangements have been made.
- CONDITION 5:** Principal or Civil Contractor to provide Fauna Spotter unless other arrangements have been made.
- CONDITION 6:** If work is halted through no fault of Mulching Services which results in us being unable to remove our equipment from site, a daily charge will apply.
- CONDITION 7:** This quote does not include traffic control for works required or unloading and loading of machinery when required, unless alternative arrangements have been made.
- CONDITION 8:** Water trucks for dust suppression are to be supplied by Principal or Civil Contractor unless other arrangements have been made. Particularly during grinding operations.

If you have any questions relating to the above, please do not hesitate to call me on the number provided below. Feel free to visit our website www.mulchingservices.com.au for more information on our equipment and services including a short

MULCHING SERVICES_{PTY LTD}

Land Clearing and Mulching

video of our machinery in operation.

Regards



Blair Campbell
Managing Director
M: 0419 388 229

QUOTATION

Date: 15/09/2021

QUOTE NO: CE FV 01

To: **Virginia Hemsley**
Accounts
Carsburg Earthmoving
207 Elliot Road
Banyo QLD 4014
M: 0407 730 543
E: virginia@carsburgearthmoving.com.au

Fauna Spotter Catcher and Fauna Management Services Lot 118 Condamine Dr, Fernvale

DESCRIPTION OF ACTIVITIES	PER UNIT	TOTAL
<u>Fauna Habitat Assessment:</u> (if required) In-field investigations (Pre-vegetation clearance) Per Consultant. Minimum of 4 hours p/day.	\$ 65.00 p/hour	\$ 260.00 min p/day
Fauna Habitat Assessment Report (Minimum of 3 hours report writing)	\$ 55.00 p/hour	TBA
<u>Fauna Spotter Catcher Services:</u> (Weekdays only) Per Consultant. Minimum of 4 hours p/day. Includes pre-start meetings and inductions.	\$ 65.00 p/hour	\$ 260.00 min p/day
<u>Fauna Spotter Catcher Services:</u> (Weekends, night works and public holidays only) Per Consultant. Minimum of 4 hours p/day. Includes pre-start meetings and inductions.	\$ 85.00 p/hour	\$ 340.00 min p/day
Activities report (Post-clearance report) (if required) (Minimum of 2 hours report writing)	\$ 55.00 p/hour	\$110.00

Quotation exclusive of GST



Quote

Vidgil Pty Ltd
Po Box 63
Samford QLD 4520
Phone: 07 3289 6480
Fax: 07 3289 3778

Email:- admin@vidgil.com.au

A.C.N 119 823 139 A.B.N 11 235 836 963
VIDGIL PTY LTD AS TRUSTEE FOR THE
DICKSON FAMILY TRUST TRADING UNDER
VIDGIL PTY LTD

Quote

Carsburg Civil Pty Ltd
PO Box 8
BANYO QLD 4014

Quote #: **00028087**

Date: **13/09/2021**

DESCRIPTION	EX AMOUNT	GST	TOTAL
Supply and install sediment containment barrier up to 40L/M	\$265.00	\$26.50	\$291.50
Supply and install additional approx 191 L/M sediment containment barrier @ \$5.00 per L/M	\$955.00	\$95.50	\$1050.50
Site :- Lot 118 Condamine Dr, Fernvale			

Price Inc GST

\$1,342.00

DIRECT DEPOSIT DETAILS

BSB 014-203 ANZ

Account No - 4935 26018

The Dickson Family Trust

This quote remains valid for 30 days

Our reference:

Vidgil Pty Ltd
Po Box 63
Samford QLD 4520

Carsburg Civil Pty Ltd
PO Box 8
BANYO QLD 4014

Quote

\$1,342.00

We appreciate your business.

**Vision Surveys (QLD) Pty Ltd**

ABN: 84 128 752 947

PO Box 3206, Hendra

Queensland, 4011

(07) 3638 0259

brisbane@visionsurveysqld.com.au

Carsburg Civil Pty Ltd

207 Elliott Rd, Banyo Qld 4014

Attn: Virginia Hemsley

accounts@carsburgearthmoving.com.au

QUOTE**0020265****Date:**

25 Aug 2021

Project No :

20763

PO Number:

A-15235

QUOTE FOR PROFESSIONAL FEES**Lot 118 Condamine Dr, Fernvale****SURVEYING SERVICES**

Download and review plans, correspondence	1.00	hrs at	125.00	\$125.00
Calc architectural plans for setout	1.00	hrs at	125.00	\$125.00
Travel to and from site, setup control, stakeout approx. building corners and pads for tennis court and carpark	6.00	hrs at	125.00	\$750.00
Produce Setout Sketch	0.75	hrs at	125.00	\$93.75

Subtotal: \$1093.75**GST:** \$109.38**Total:** **\$1203.13**Westpac
BSB: 034-181
ACC: 220760
Ref: 0020265

Credit Card payments: call accounts 07 4948 3781 with card details (1.5% card fee applies).

