




INFORMAL SLAB - IS

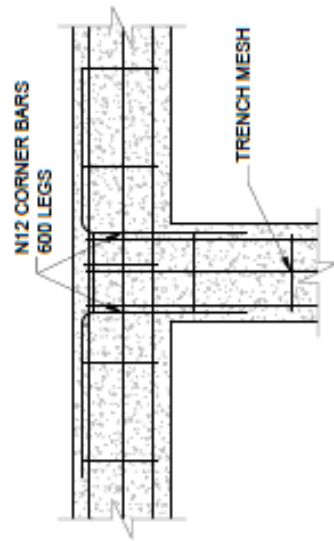

EDGE TO INTERNAL
BEAM CONNECTION DETAIL

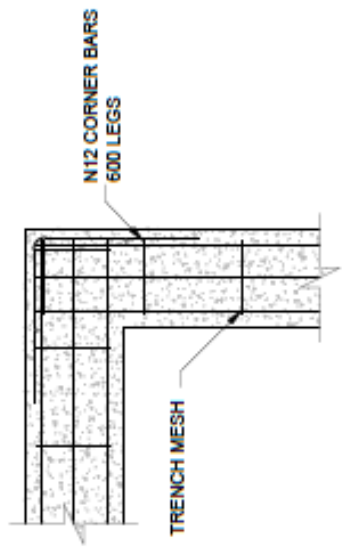


CORNER EDGE
BEAM CONNECTION DETAIL

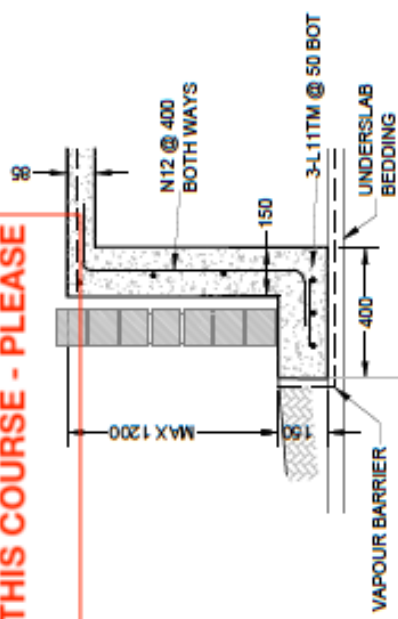

DROPPED EDGE BEAM - DEB

PIER NOTES

1. MINIMUM EMBEDMENT INTO FOUNDING MATERIAL TO BE;
 - 500mm INTO DENSE SAND
 - 500mm INTO STIFF CLAY.
 - 200mm INTO WEATHERED ROCK.
2. MINIMUM PIER REINFORCEMENT UNO TO BE;
 - NO REQ < 1000mm.
 - 1-N16 BAR < 2000mm.
 - 3-N12 BARS & R6 SPIRAL LIGS < 3000mm.
 - 4-N12 BARS & R6 SPIRAL LIGS < 4500mm.

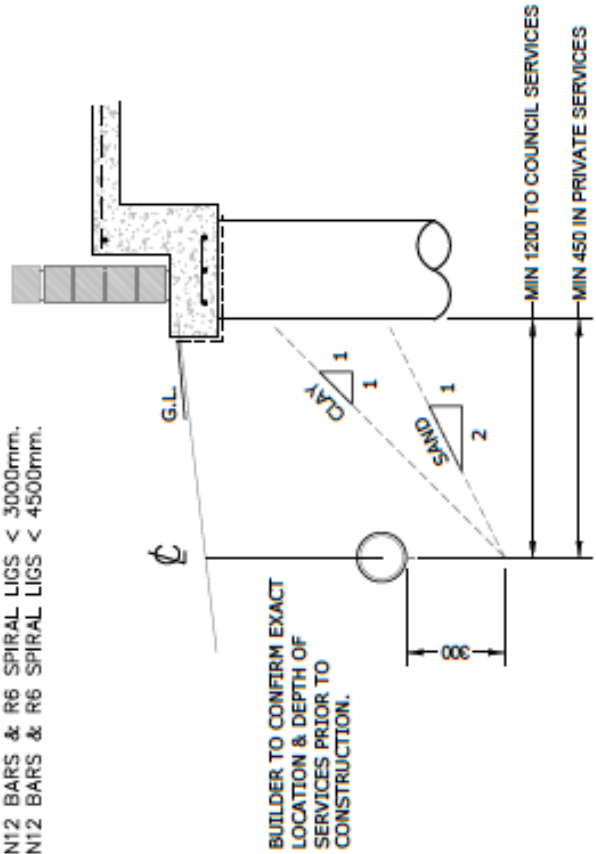

PIERING ADJACENT TO SERVICES