

EXISTING MIRROR TO BE REMOVED AND RETAINED FOR REUSE ELSEWHERE

CEILING TILES LEVEL 2090

EXISTING CEILING TILE TO BE REMOVED AND DISPOSED

EXISTING HAND TOWEL DISPENSER TO BE RETAINED

EXISTING TOILET ROLL DISPENSER TO BE RETAINED

EXISTING SOAP DISPENSER & SPLASHBACK TO BE DEMOLISHED


EXISTING BASIN & MIXER TO BE REMOVED AND DISPOSED

EXISTING VANITY TO BE DEMOLISHED

EXISTING W.C. TO BE DEMOLISHED

EXISTING BIN TO BE REMOVED & DISPOSED

FINISHED FLOOR LEVEL 0.0

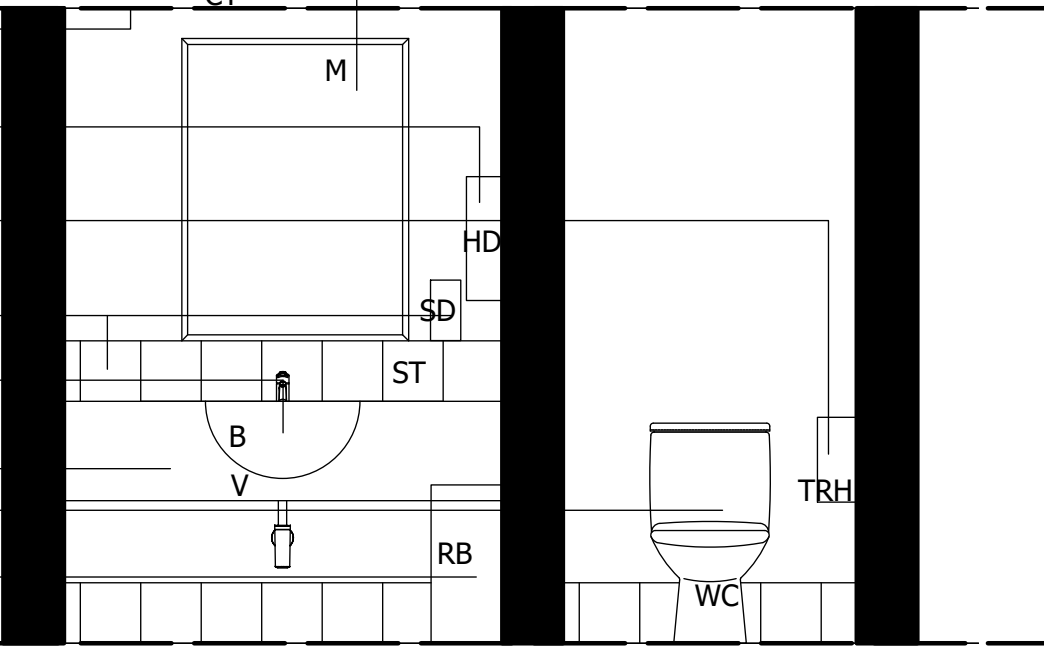

EXISTING ELEVATION FIRST FLOOR FEMALE TOILET

NEW CEILING TILES

NEW FRAMED MIRROR TO BE INSTALLED FULL LENGTH OF WALL

EXISTING HAND TOWEL DISPENSER TO REMAIN AS IS

NEW HAND SOAP DISPENSER LOCATION TBC

NEW SPLASHBACK TILES TO REPLACE EXISTING


NEW VANITY, BUILT IN BASIN AND MIXER TO REPLACE EXISTING, DETAILS TBC BY CARPENTER

NEW TOILET TO REPLACE EXISTING

NEW BIN TO REPLACE EXISTING



PROPOSED ELEVATION FIRST FLOOR FEMALE TOILET

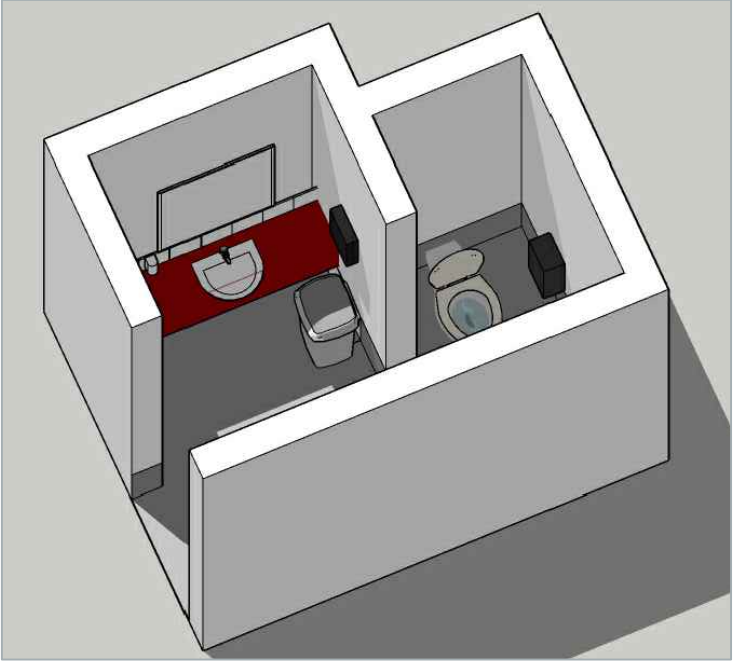

EXISTING FIRST FLOOR FEMALE TOILET

EXISTING TOILET ROLL DISPENSER TO BE RETAINED


EXISTING HAND TOWEL DISPENSER TO BE RETAINED

EXISTING W.C. TO BE DEMOLISHED

EXISTING BIN TO BE REMOVED & DISPOSED

EXISTING VANITY, BASIN & MIXER TO BE REMOVED AND DISPOSED

EXISTING SOAP DISPENSER & SPLASHBACK TO BE DEMOLISHED

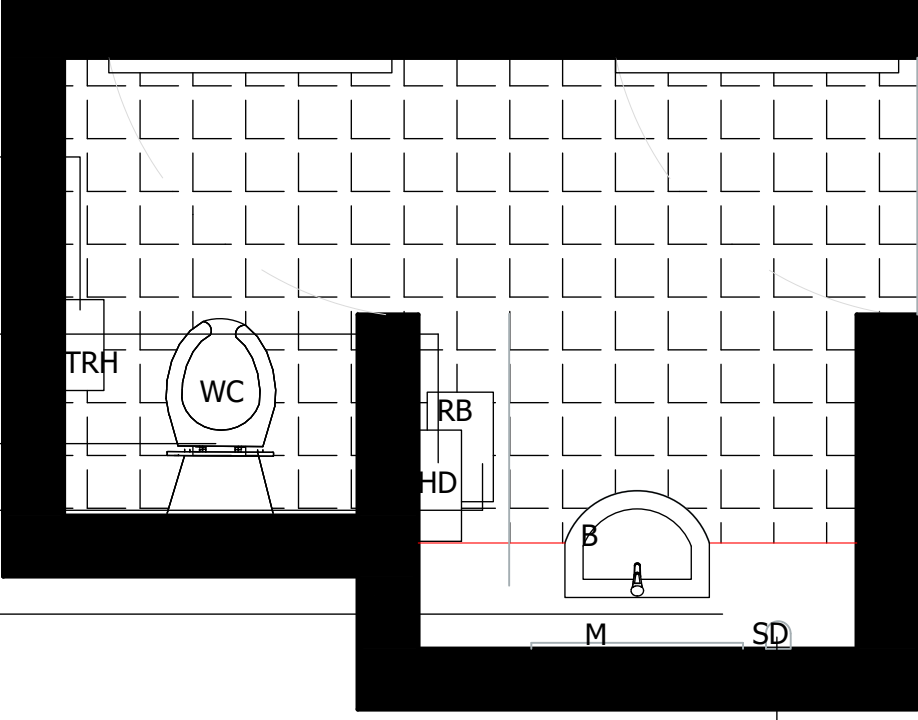

EXISTING FIRST FLOOR PLAN FEMALE TOILET

NEW SIGNAGE TO REPLACE EXISTING

EXISTING TOILET ROLL HOLDER TO BE RETAINED

NEW BIN TO REPLACE EXISTING


EXISTING HAND TOWEL HOLDER TO BE RETAINED

NEW TOILET TO REPLACE EXISTING

NEW SPLASHBACK TILES


NEW HAND SOAP DISPENSER LOCATION TBC

NEW BASIN, MIXER IN THE NEW IN-BUILT VANITY

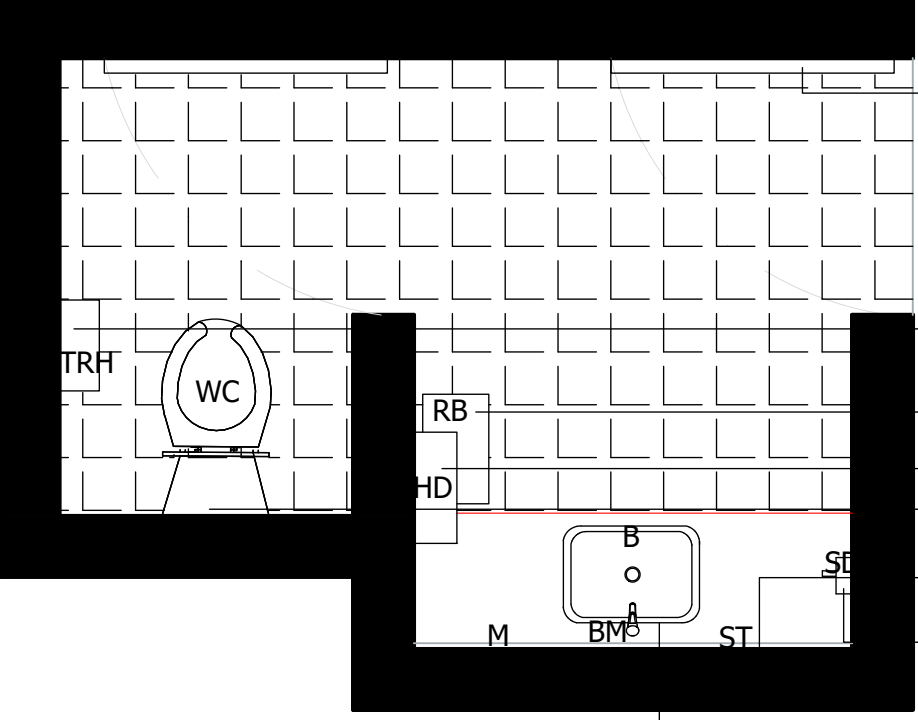

PROPOSED FIRST FLOOR PLAN FEMALE TOILET

PROPOSED FIRST FLOOR FEMALE TOILET

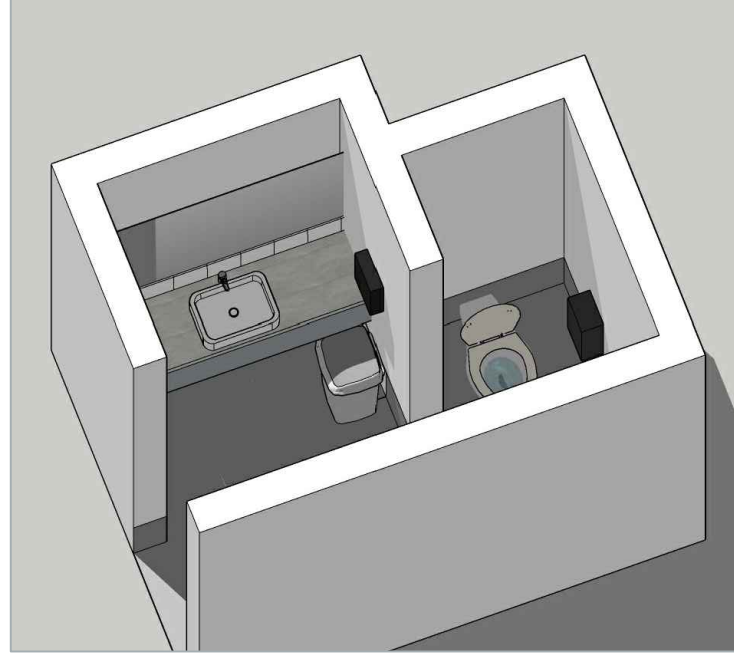

CEILING TILES LEVEL 2090

EXISTING CEILING TILE TO BE REMOVED AND DISPOSED

EXISTING HAND TOWEL DISPENSER TO BE RETAINED

EXISTING TOILET ROLL DISPENSER TO BE REMOVED AND DISPOSED


EXISTING SPLASHBACK TILES & SOAP DISPENSER TO BE DEMOLISHED

EXISTING BASIN & MIXER TO BE REMOVED AND DISPOSED

EXISTING W.C. TO BE DEMOLISHED

EXISTING BIN TO BE REMOVED & DISPOSED

FINISHED FLOOR LEVEL 0.0

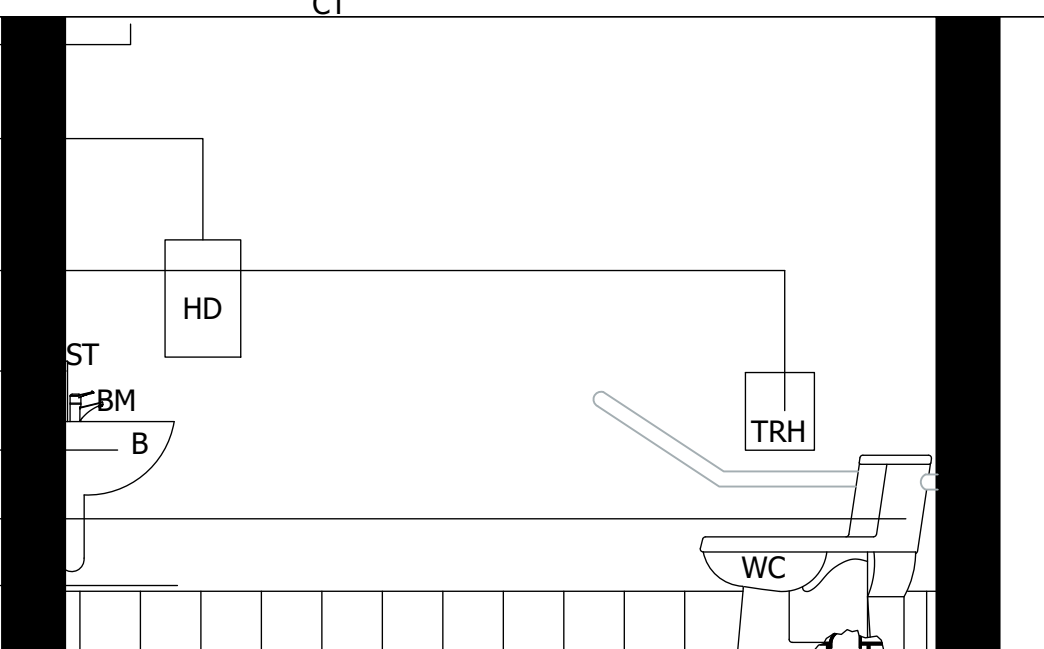

EXISTING ELEVATION FIRST FLOOR PWD TOILET

NEW 8 CEILING TILES & 2 NEW LIGHTS

NEW FRAMED MIRROR


EXISTING HAND TOWEL HOLDER TO BE RETAINED

NEW SPLASHBACK TILES TO REPLACE EXISTING

NEW HAND SOAP DISPENSER LOCATION TBC


NEW TOILET AND TOILET ROLL HOLDER TO REPLACE EXISTING

NEW HAND BASIN AND MIXER AS COMPLIANT

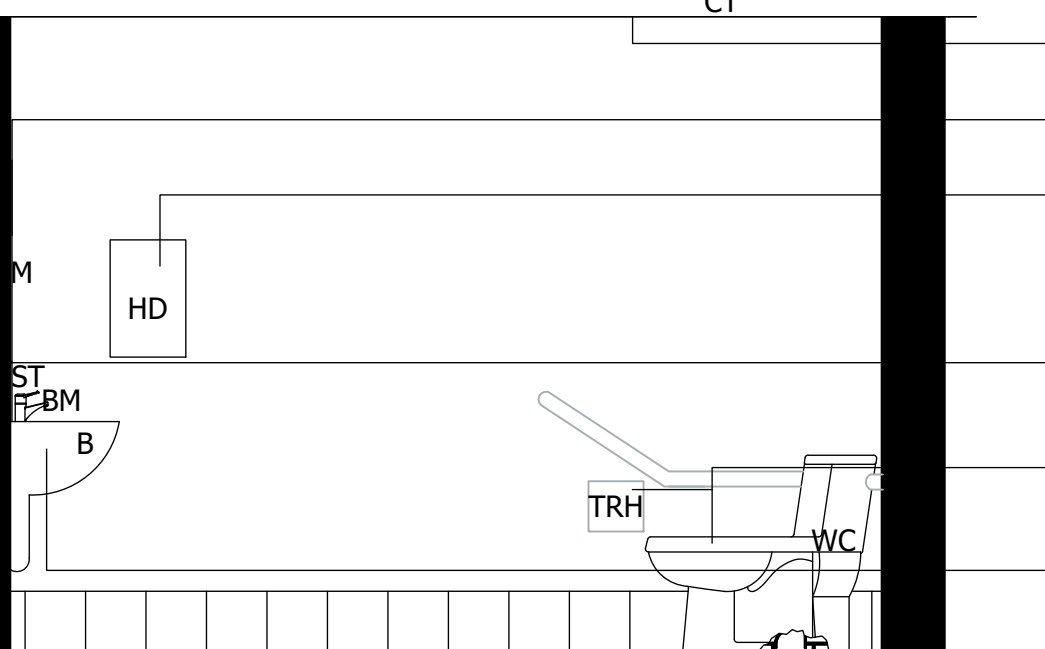

PROPOSED ELEVATION FIRST FLOOR PWD TOILET

PROPOSED FIRST FLOOR PWD TOILET

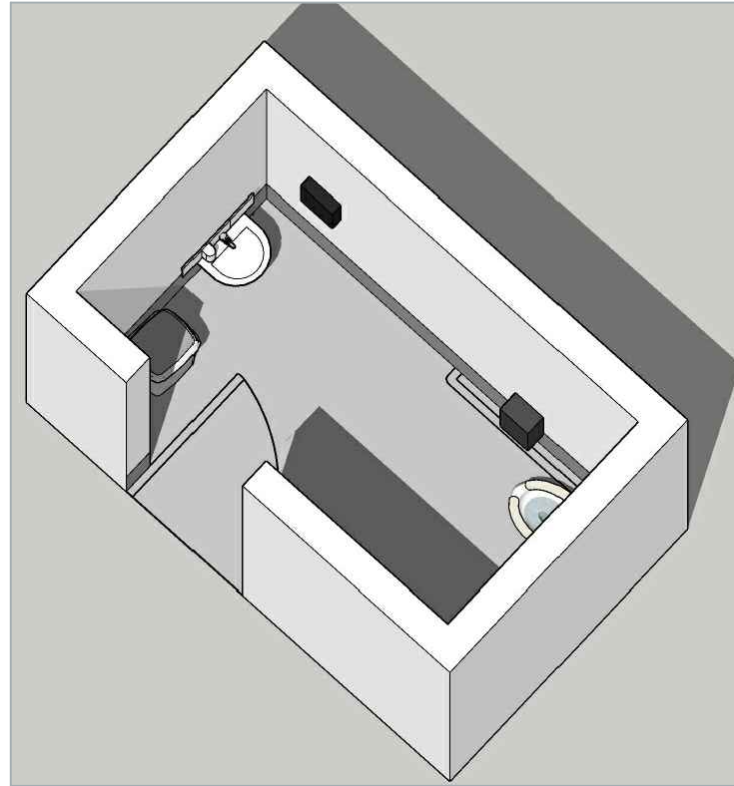

EXISTING SOAP DISPENSER TO BE DEMOLISHED


EXISTING BIN TO BE REMOVED & DISPOSED

EXISTING W.C. TO BE DEMOLISHED

EXISTING BASIN, SPLASHBACK TILES & MIXER TO BE REMOVED AND DISPOSED

EXISTING TOILET ROLL DISPENSER TO BE DEMOLISHED

EXISTING HAND TOWEL DISPENSER TO BE RETAINED

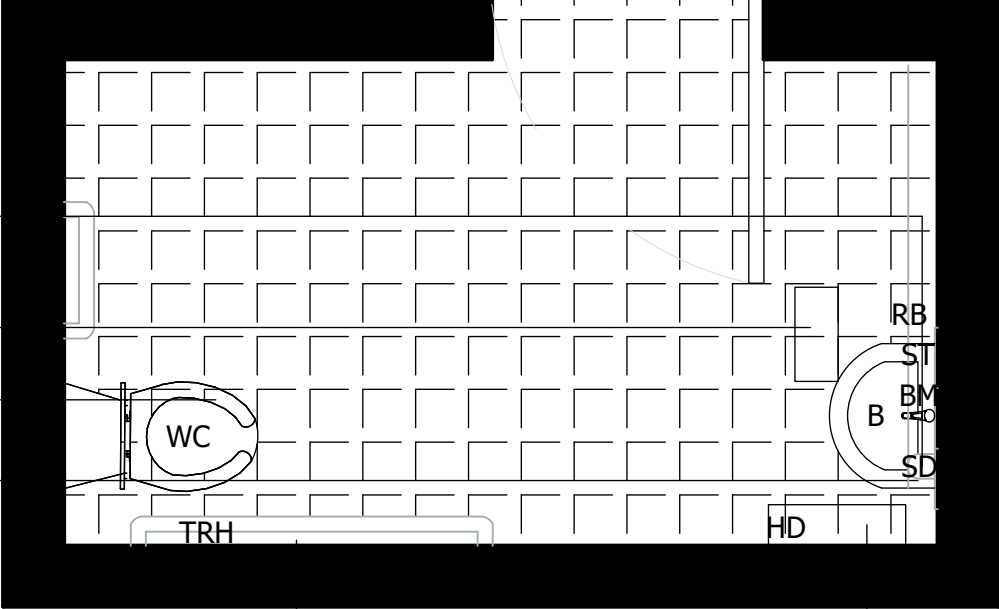

EXISTING FIRST FLOOR PLAN PWD TOILET

NEW SIGNAGE TO REPLACE EXISTING

NEW BIN TO REPLACE EXISTING

NEW SPLASHBACK TILES TO REPLACE EXISTING

NEW TOILET TO REPLACE EXISTING


NEW HAND SOAP DISPENSER LOCATION TBC

NEW BASIN AND MIXER AS COMPLIANT

EXISTING HAND TOWEL HOLDER TO BE RETAINED


NEW FRAMED MIRROR

EXISTING TOILET ROLL HOLDER TO BE REMOVED AND REPLACED

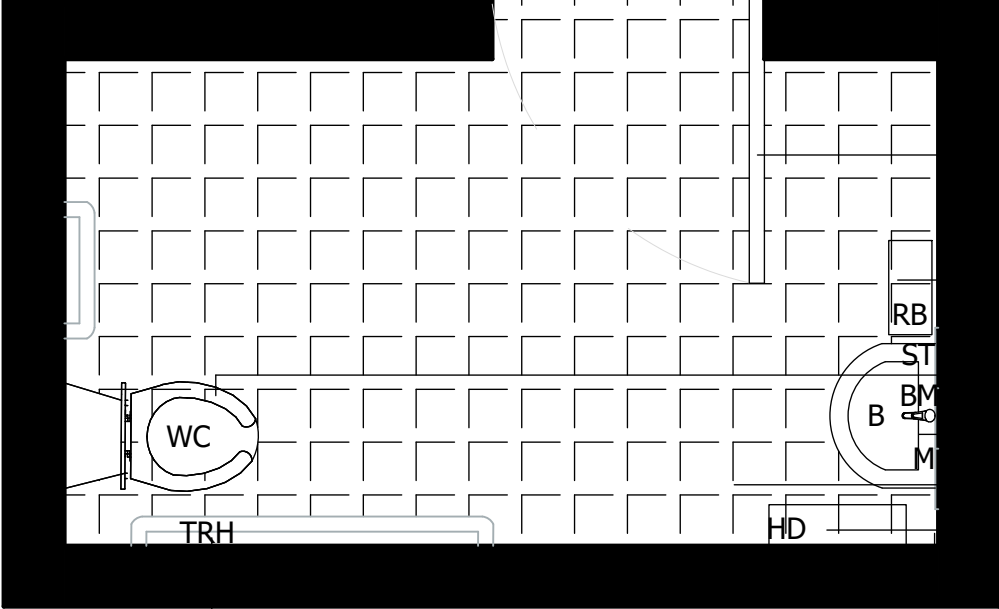

PROPOSED FIRST FLOOR PLAN PWD TOILET

PROPOSED FIRST FLOOR PWD TOILET

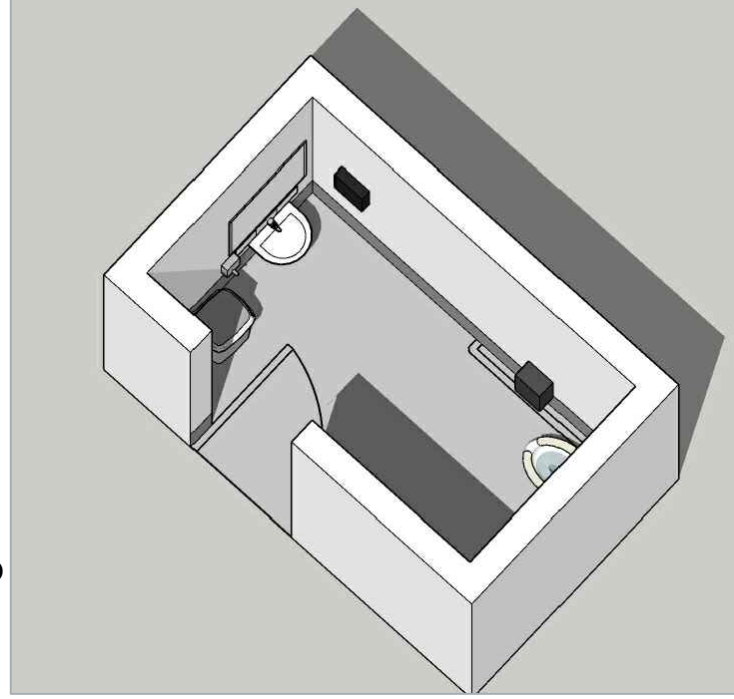

LEGEND

HD HAND TOWEL DISPENSER

B BASIN

BM BASIN MIXER

CT CEILING TILES

M MIRROR

U URINALS

V DOOR VENTS

RB RUBBISH BIN

SD SOAP DISPENSER

ST SPLASHBACK TILES

TD TOILET ROLL DISPENSER

T TOILET

NOTES :

1. DOOR VENTS ARE NOT TO BE REPLACED ON THIS FLOOR LEVEL.

2. NEW SOAP DISPENSER ONLY ON THIS FLOOR. NEW POSITIONS OF NEW SOAP DISPENSERS ON WALL.

3. HAND TOWEL HOLDERS TO BE RETAINED ON THIS FLOOR LEVEL.

4. TOILET ROLL HOLDER TO BE RETAINED IN THE FEMALE TOILET BUT REPLACED IN THE PWD.

5. ALL DIMENSIONS TO BE CONFIRMED ON SITE PRIOR TO MANUFACTURING.

6. EXISTING DOOR SIGNAGE TO BE REPLACED WITH NEW.

7. VANITY LAMINATES - GRAFITO FORMICA RANGE VELOUR FINISH FOR BENCHTOPS AND FRONT TO BE BLUEGRASS FINISH.

CORE4

Property Services Partners

FOR CONSTRUCTION

GENERAL NOTES:

CONTRACTOR/S TO CONFIRM ALL RELEVANT DIMENSIONS, LEVELS AND DETAILS ON-SITE PRIOR TO COMMENCEMENT OF WORKS.

CONTRACTOR/S TO REPORT ANY ERRORS OR DISCREPANCIES TO THE AUTHOR PRIOR TO THE COMMENCEMENT OF WORKS.

CONSTRUCTION TO COMPLY WITH ALL RELEVANT BUILDING CODES AND STANDARDS. STANDARDS OVERRIDE ALL DETAILS IN THESE DRAWINGS.

DO NOT SCALE DRAWINGS. ALL PRODUCTS AND EQUIPMENT TO BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS. COLORS/TEXTURES ARE INDICATIVE ONLY.

CONTACT:

1300 267 333 | 0461 273 092

RCHATTERJEE@CORE4SERVICE.COM

WWW.CORE4SERVICE.COM.AU

7/121 NEWMARKET ROAD, WINDSOR QLD 4030

ISSUE	BY	DATE	REASON
A	RC	02.05.24	FOR APPROVAL

CLIENT DETAILS:

BCM TRADING PTY LTD

PROJECT


50 SHERWOOD STREET

DRAWING

PROPOSED ADDITIONAL TOILETS - STAGE 2

SCALE: 1:50@A3	PROJECT NO: #46365
ISSUE: A	PAGE NO: PCPP.06

NORTH:



AUTHOR: RC	DATE: 02.05.24
---------------	-------------------

COPYRIGHT © 2024